


INDUSTRIAL DEHUMIDIFIER

Remove Moisture From The Air

Maximum Relative Humidity **40RH%**

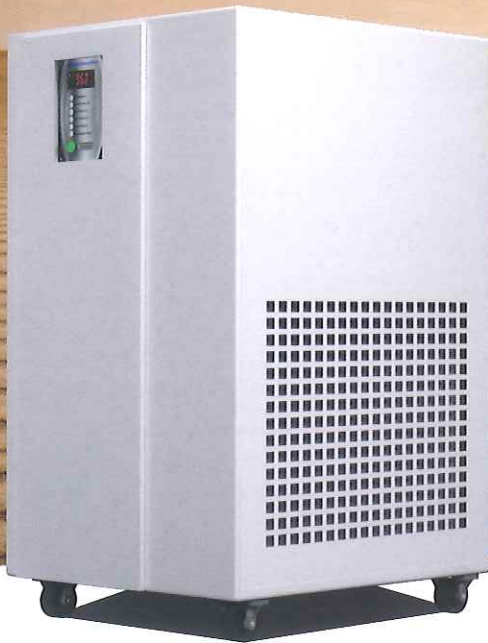

SUITABLE FOR

- Archives Storage
- Laboratory
- Library
- Food storage
- Food packaging



Food Storage



Food process



Laboratory



Archives storage

FEATURES

- Humidity Level selection
- Fault and Humidity Indicators
- Auto discharge of water (can opt for manual removal of water type)
- Auto-defrost function (for low temperature environment)
- For in-door application (out-door application available upon request)
- Portable (with castors)
- Low noise level

SPECIFICATION

		Heavy Duty Series			
Model		DH100	DH150	DH200	DH500
Compressor Power	KW	0.75	1.13	1.5	3.7
	HP	1	1.5	2	5
Air Flow Rate	m ³ /Hr	450	600	750	3000
Cover Area (Indicative)	m ²	43	86	104	250
	Ft ²	460	925	1120	2690
Dimension (MM)	Length	450	500	550	990
	Width	450	500	550	680
	Height	900	1000	1200	1180
Voltage		220-240V, 50Hz, 1Phase			



SCP PROCESS COOLING (M) SDN BHD
SCP AUTOMATION (M) SDN BHD

55, Jalan Matahari Aa U5/Aa, Taman Subang Damai, 40150 Shah Alam, Selangor, Malaysia



Tel : 603-7845 0129

Fax: 603-7845 0139

Email : sales@scp.com.my

Website : www.scp.com.my